



## Article Info

Date Received: 15/03/2026

Date Revised: 05/04/2026

Available Online: 27/04/2026

# Real Time Social Media Sentiment Analysis with Deep Learning

1. S. Meghana, 2. Sd. Tabassum, 3. T. Mythri, 4. T. Yashoda, 5. U. Ramu, 6. E. S. Ekambareesh

## Author Affiliations

1,2,3,4,5. B. Tech CSE Students, Dept. of CSE, Sir C R Reddy College of Engineering, Eluru.  
6. Assistant Professor, Dept. of CSE, Sir C R Reddy College of Engineering, Eluru.

DOI: 10.64264/ijisea/0737

## ABSTARCT

This project presents a scalable solution for multi-class sentiment analysis of Twitter data. It classifies tweets into five categories: Extremely Negative, Negative, Neutral, Positive, and Extremely Positive. The system is built using FastAPI for backend API development. A deep learning model is developed using TensorFlow for accurate sentiment prediction. The model is trained on a large dataset of tweets. NLP techniques like text cleaning, normalization, and tokenization are applied. Sequence padding is used to make inputs suitable for the neural network. A softmax layer enables multi-class classification. The trained model is integrated into a FastAPI service for real-time predictions. This project demonstrates a complete workflow from data processing to deployment.

**Key words:** Sentiment Analysis, Natural Language Processing (NLP), Deep Learning, FastAPI, TensorFlow, REST API, Tokenization, Real-Time Inference, Multi-Class Classification, Social Media Mining

## 1. INTRODUCTION

Real-time sentiment analysis has become an important requirement in recent years due to the rapid growth of social media platforms and the increasing volume of user-generated content. Platforms such as Twitter, Reddit, and YouTube generate massive amounts of textual data every day,



reflecting public opinions, emotions, and attitudes. Understanding this data is essential for businesses, organizations, and researchers to make informed decisions. Without proper analysis, valuable insights may be lost, leading to poor decision-making and reduced customer satisfaction. Traditional sentiment analysis approaches mainly rely on rule-based methods and basic machine learning techniques such as Naïve Bayes and Support Vector Machines. While these methods perform reasonably well for simple datasets, they are not effective in handling complex and unstructured social media data. User-generated content often includes slang, emojis, abbreviations, and contextual variations, which introduce nonlinear relationships and dependencies that traditional models fail to capture accurately.

With the advancement of data analytics and deep learning, more intelligent approaches have been developed to overcome these challenges. Machine learning models can learn patterns from historical data, but deep learning techniques provide better performance by understanding contextual and sequential relationships in text. In particular, models such as Long Short-Term Memory (LSTM) networks are capable of capturing long-term dependencies and extracting meaningful features from textual data, making them highly suitable for sentiment analysis tasks. This work focuses on developing a real-time sentiment analysis system using a data-driven approach. The study utilizes textual data collected from social media platforms and applies preprocessing techniques such as text cleaning, tokenization, and normalization to prepare the data. A deep learning model is then trained to identify patterns in the text and classify sentiments into multiple categories, providing accurate and meaningful insights into user opinions.

## 2. RELATED WORK

Sentiment analysis has been widely studied using rule-based, machine learning, and deep learning approaches. Traditional methods such as lexicon-based techniques rely on predefined dictionaries of positive and negative words. These methods are simple and easy to implement, but they are not effective in understanding context, sarcasm, or complex sentence structures.

Machine learning techniques such as Naïve Bayes, Decision Trees, and Support Vector Machines improve sentiment classification by learning patterns from labeled data. These models perform better than rule-based methods in handling large datasets. However, they require manual feature extraction and fail to capture the sequential and contextual nature of textual data.

To overcome these limitations, deep learning models such as Recurrent Neural Networks (RNN) and Long Short-Term Memory (LSTM) networks are widely used. LSTM models are capable of learning from sequential data and capturing long-term dependencies in text, leading to improved sentiment classification accuracy. Despite their advantages, these models require large datasets and high computational resources.

Recent advancements focus on transformer-based models such as BERT, which provide better contextual understanding of language. These models achieve high accuracy but are computationally expensive and complex to implement.



Some studies also explore hybrid approaches that combine machine learning and deep learning techniques to improve performance. While these approaches enhance accuracy, they increase system complexity and require careful tuning.

Based on these observations, the proposed work uses a deep learning-based approach for multi-class sentiment analysis, aiming to provide accurate, scalable, and real-time sentiment classification while addressing the limitations of existing systems.

Table 1: Summary of Literature review

S No	Author(s) & Year	Method / Model Used	Theme / Approach	Key Findings	Limitations
1	Ian Goodfellow et al. (2016)	Deep Neural Networks	Deep Learning	Provides strong foundation for AI and deep learning models	Requires large data and high computation
2	Christopher D. Manning & Hinrich Schütze (1999)	Statistical NLP Models	Language Processing	Introduces core NLP concepts and statistical methods	Limited handling of complex context
3	Jacob Eisenstein (2019)	NLP Techniques	Modern NLP	Explains advanced NLP approaches for text processing	Less focus on real-time applications
4	Steven Bird et al. (2009)	Python NLP (NLTK)	Practical NLP Implementation	Easy implementation of NLP tasks using Python	Limited deep learning capabilities
5	François Chollet (2017)	Neural Networks (Keras)	Deep Learning for NLP	Simplifies deep learning model building	Needs tuning and large datasets
6	Ashish Vaswani et al. (2017)	Transformer Model	Attention Mechanism	Improves context understanding in text	Computationally expensive
7	Tomas Mikolov et al. (2013)	Word2Vec	Word Embeddings	Efficient word representation learning	Limited context awareness
8	Jeffrey Pennington et al. (2014)	GloVe	Global Word Representation	Captures sem-antic relationships between words	Static embeddings, no dynamic context
9	Google (TensorFlow Docs)	TensorFlow Framework	Deep Learning Implementation	Supports scalable model development	Requires expertise
10	FastAPI (Docs)	API Framework	Backend Development	High-performance API for real-time systems	Limited built-in UI support
11	Twitter (API Docs)	Data Streaming APIs	Social Media Data Collection	Enables real-time data extraction	API limits and restrictions
12	Bing Liu (2012)	Sentiment Analysis Models	Opinion Mining	Strong foundation for sentiment analysis	Limited deep learning techniques



13	Bo Pang & Lillian Lee (2008)	ML-based Sentiment Analysis	Opinion Mining	Early work in sentiment classification	Limited context understanding
14	Tom Mitchell (1997)	Machine Learning Algorithms	Learning Models	Fundamental ML concepts	Not specific to NLP
15	Andrew Ng (2018)	ML Strategy	Model Optimization	Helps improve ML model performance	No direct implementation methods
16	<b>Proposed Work</b>	Deep Learning (LSTM + NLP)	Real-Time Multi-Class Sentiment Analysis	Provides accurate, real-time and fine-grained sentiment classification	Requires computational resources

### 3. PROPOSED SYSTEM

The proposed system aims to perform real-time social media sentiment analysis using a combination of Natural Language Processing and deep learning techniques. It utilizes user-generated textual data from social media platforms to identify sentiment patterns and generate accurate classification results.

The dataset is collected from social media sources and pre-processed by cleaning the text, removing noise such as special characters, URLs, and stopwords, and organizing the data into a structured format. Feature engineering is performed using techniques such as tokenization and sequence padding to convert text into numerical representations suitable for model input.

A deep learning model based on Long Short-Term Memory (LSTM) is implemented to capture contextual and sequential information from text data. The model is trained using TensorFlow to classify sentiments into five categories: Extremely Positive, Positive, Neutral, Negative, and Extremely Negative. FastAPI is used to deploy the model and enable real-time predictions through RESTful APIs.

The dataset is divided into training and testing sets for model development and evaluation. The performance of the model is measured using metrics such as accuracy, precision, recall, and F1-score.

By integrating deep learning with real-time API services, the system improves prediction accuracy by capturing both contextual and emotional variations in text data, enabling efficient analysis of large-scale social media content.

**SYSTEM ARCHITECTURE :** The working of the proposed system can be explained through the following step-by-step workflow, which corresponds to the system architecture diagram.



**Data Collection:** The process begins with collecting user-generated textual data from social media platforms such as Twitter, Reddit, and online review sites. This data includes tweets, comments, and reviews that reflect user opinions and emotions. The collected data forms the foundation for training the sentiment analysis model.

**Data Preprocessing:** Once the data is collected, it is processed to make it suitable for analysis. The text is cleaned by removing special characters, URLs, emojis, and stopwords. The data is normalized and converted into a consistent format to improve model performance and ensure better accuracy.

**Feature Engineering:** In this step, important features are extracted from the text data. Techniques such as tokenization are applied to break text into words, and sequence padding is used to maintain uniform input length. These features help the model understand the structure and meaning of the text.

**Data Transformation:** The processed text is converted into numerical representations using embedding techniques. This transformation allows the deep learning model to interpret textual data as input for training and prediction.

**Dataset Splitting:** The dataset is divided into training and testing sets. Typically, 80% of the data is used for training the model, while the remaining 20% is used for testing. This ensures that the model is evaluated on unseen data for better generalization.

**Model Training – Deep Learning (LSTM):** The Long Short-Term Memory (LSTM) model is trained using the processed dataset. It captures sequential and contextual relationships in text data, allowing the system to understand sentiment patterns effectively. The model learns from past word sequences to improve prediction accuracy.

**Model Integration (FastAPI):** After training, the model is integrated into a FastAPI backend. This allows the system to process user input in real time and return sentiment predictions through RESTful APIs efficiently [10].

**Model Evaluation:** The trained model is evaluated using the testing dataset. Performance metrics such as accuracy, precision, recall, and F1-score are used to measure how effectively the model classifies sentiments.



**Prediction Generation:**The system takes user input text and processes it through the trained model to generate sentiment predictions. The output is classified into five categories: Extremely Positive, Positive, Neutral, Negative, and Extremely Negative.

**Result Visualization:**The final step involves displaying the sentiment results through a user-friendly web interface. The predictions are presented clearly, allowing users to understand the sentiment of the input text in real time.

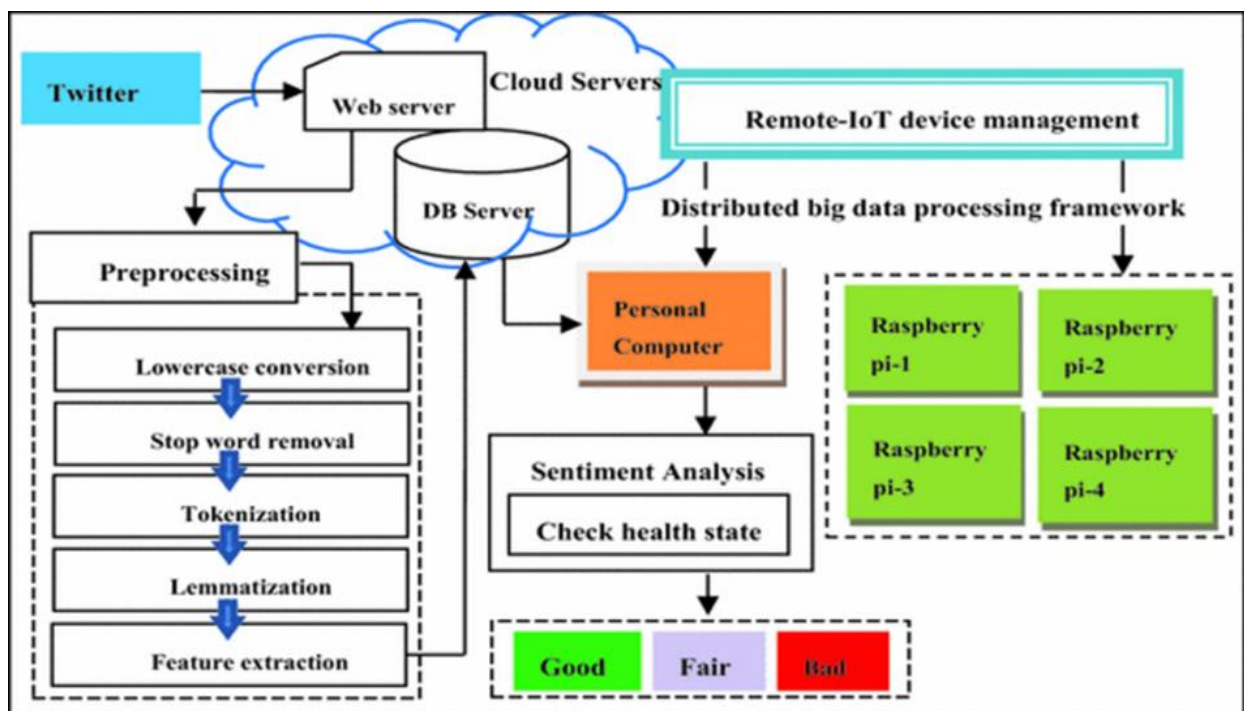


Fig: 1. System Architecture

### REQUIREMENT ANALYSIS:

The system begins by collecting user-generated textual data from social media platforms such as Twitter, Reddit, and online reviews, which is then preprocessed by removing noise like special characters, URLs, emojis, and stopwords to ensure data quality [11][4]. Feature engineering techniques such as tokenization and sequence padding are applied, and the text is transformed into numerical representations using embedding methods for model input [7].

The dataset is split into training and testing sets, and a Long Short-Term Memory (LSTM) deep learning model is trained to capture contextual and sequential patterns in the data [5]. The trained model is integrated with a FastAPI backend to enable real-time sentiment prediction through RESTful APIs [10].



The system classifies input text into five sentiment categories—**Extremely Positive, Positive, Neutral, Negative, and Extremely Negative**—and evaluates performance using metrics such as accuracy, precision, recall, and F1-score. Finally, the results are displayed through a user-friendly interface, providing clear and real-time sentiment insights.

#### 4. METHODOLOGY

The design and methodology of the proposed Real-Time Social Media Sentiment Analysis system focus on developing a scalable and efficient architecture by integrating deep learning with modern web technologies. The system follows a modular and layered architecture consisting of a frontend layer (HTML, CSS, JavaScript), backend API layer (FastAPI), deep learning model (TensorFlow), and an optional database layer for data storage. The frontend enables user interaction, while the backend processes requests and communicates with the deep learning model for sentiment prediction.

The data flow of the system is represented using Data Flow Diagrams (DFD), where Level 0 illustrates the overall interaction between the user and the system, and Level 1 provides a detailed view of processes such as input handling, preprocessing, sentiment prediction, and result generation. Additionally, UML class diagrams are used to represent the structural design of the system, showing relationships between components such as user input, processing modules, and prediction outputs.

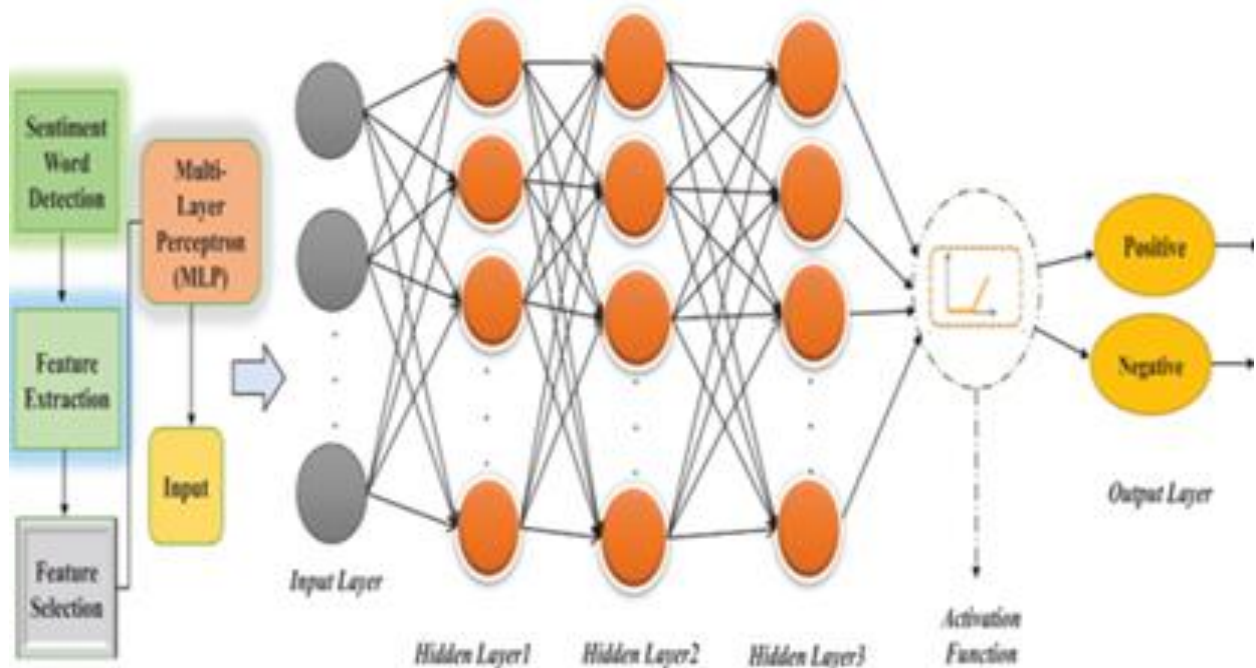


Fig 2: Data Flow diagram



## 5. RESULTS AND EVALUATION

The proposed Real-Time Social Media Sentiment Analysis system is evaluated using a testing dataset to measure its effectiveness in classifying sentiments. The LSTM-based deep learning model is tested on unseen data to ensure reliability and generalization.

Performance is measured using metrics such as accuracy, precision, recall, and F1-score. The model effectively classifies text into five sentiment categories and captures contextual variations in social media data.

The system also demonstrates efficient real-time performance through FastAPI integration, providing quick and accurate predictions. Overall, the proposed system improves accuracy and scalability compared to traditional methods, making it suitable for real-world applications.

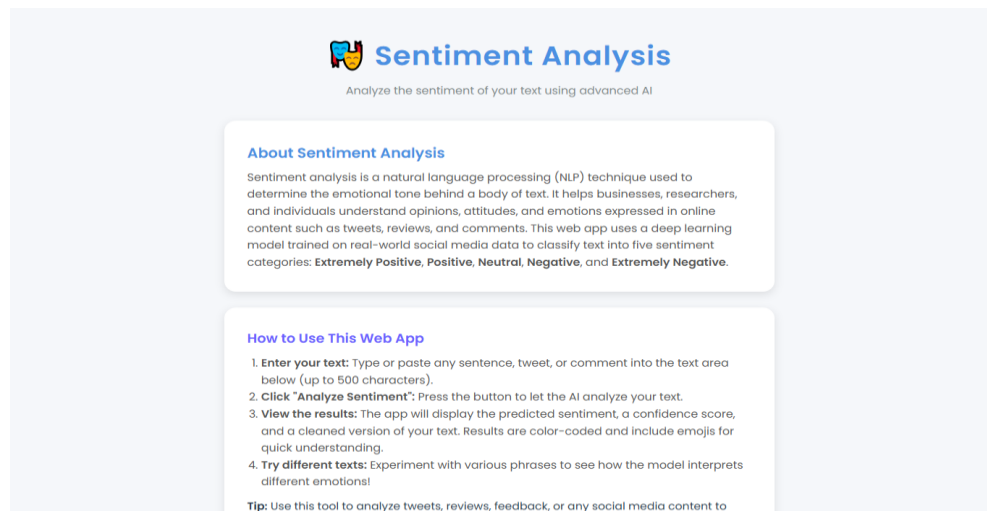
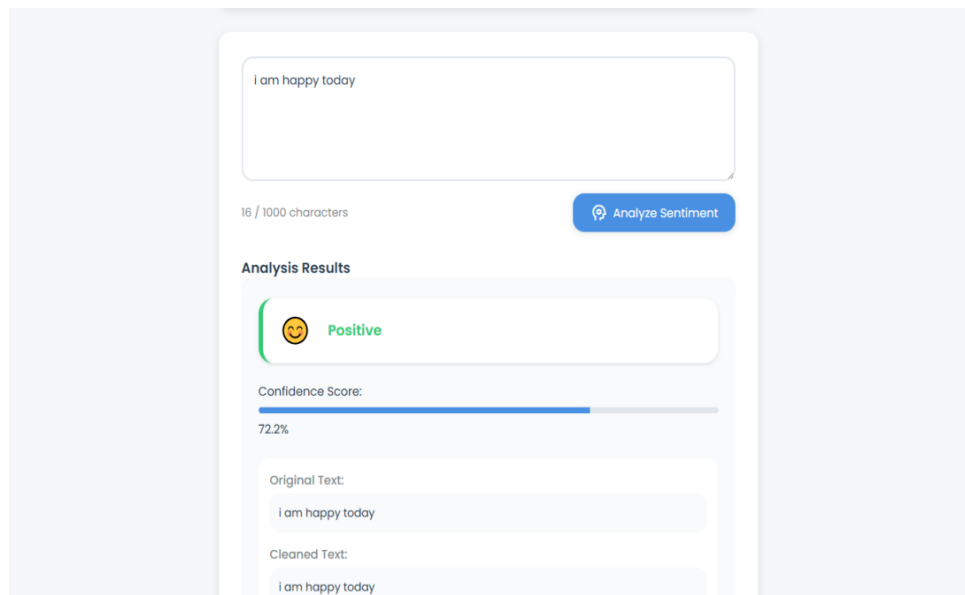


Fig 3:Sentiment Analysis



*Fig 4: Analysis Result*

## 6. CONCLUSION AND FUTURESCOPE

The successful completion of this project marks an important achievement in meeting both academic and practical goals. It focuses on identifying existing problems and providing an effective solution using modern technologies. The system integrates different modules to ensure efficiency, accuracy, and reliability while also addressing key aspects like user experience, accessibility, and data security.

Throughout the project, valuable skills in problem-solving, teamwork, and project management were developed. The results confirm that the objectives were successfully achieved. Additionally, the system is designed for future scalability, allowing further improvements such as automation, AI integration, and cross-platform support.

Overall, this project serves as a strong foundation for future development and innovation. It not only demonstrates practical application of technical knowledge but also highlights the potential to adapt and expand the system based on evolving requirements and technological advancements.

The Real-Time Social Media Sentiment Analysis system has strong potential for future improvements. While it currently performs data collection, preprocessing, sentiment classification, and visualization effectively, it can be enhanced using advanced technologies and intelligent models.

One key improvement is upgrading the sentiment analysis model using advanced techniques like LSTM, BERT, or transformer-based models to better understand complex emotions, sarcasm, and context. The system can also be extended to support multiple languages, enabling analysis of global social media data using NLP and translation techniques.



Further enhancements include emotion detection to identify feelings such as happiness, anger, and sadness, along with real-time trend prediction based on past data. Advanced visualization through interactive dashboards and expansion into mobile applications can improve accessibility and user experience. Cloud deployment can also enhance scalability and performance. Overall, with these enhancements, the system can become more intelligent, scalable, and efficient, providing deeper insights and supporting better decision-making in the future.

## REFERENCES

- [1] Ian Goodfellow, Yoshua Bengio, and Aaron Courville, "Deep Learning", MIT Press, 2016.
- [2] Christopher D. Manning and Hinrich Schütze, "Foundations of Statistical Natural Language Processing", MIT Press, 1999.
- [3] Jacob Eisenstein, "Introduction to Natural Language Processing", MIT Press, 2019.
- [4] Steven Bird, Ewan Klein, and Edward Loper, "Natural Language Processing with Python", O'Reilly Media, 2009.
- [5] François Chollet, "Deep Learning with Python", Manning Publications, 2017.
- [6] Ashish Vaswani et al., "Attention Is All You Need", NeurIPS Conference, 2017.
- [7] Tomas Mikolov et al., "Efficient Estimation of Word Representations in Vector Space", arXiv, 2013.
- [8] Jeffrey Pennington, Richard Socher, and Christopher D. Manning, "GloVe: Global Vectors for Word Representation", EMNLP, 2014.
- [9] TensorFlow Documentation, Google, <https://www.tensorflow.org>
- [10] FastAPI Documentation, <https://fastapi.tiangolo.com>
- [11] FastAPI Documentation, <https://fastapi.tiangolo.com>
- [12] Twitter API Documentation, <https://developer.twitter.com>
- [13] Bing Liu, "Sentiment Analysis and Opinion Mining", Morgan & Claypool Publishers, 2012.
- [14] Bo Pang and Lillian Lee, "Opinion Mining and Sentiment Analysis", Foundations and Trends in Information Retrieval, 2008.



[15] Tom Mitchell, *“Machine Learning”*, McGraw-Hill Education, 1997.

[16] Andrew Ng, *“Machine Learning Yearning”*, DeepLearning.AI, 2018.